


BPP-RMSBK Brock's Performance Products -Radial Mount Strap Bracket Kit



Instructions

- This Package contains:
- 2 Radial Mount Brackets
- 2 M10x20 Bolts
- 2 Serrated Washers
- 4 Shim Washers-ZX-14 ONLY



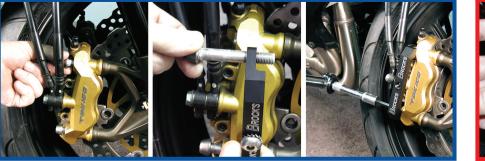

Begin by removing top and bottom brake caliper mounting bolts. Re-insert bolts through the RMSB with notched area facing toward brake caliper. Mount RMSB as shown. Torque to 39 N m (28lb-ft). Repeat on opposite side.





1 Install release buckle on left side of bike (while seated) using M10x20 bolt and serrated washer, as shown. Hand tighten.



2 Always route strap UNDER any cables and wires to prevent pinching or damage. Do not allow strap to twist. Route strap upward over steering neck, and down the other side. Secure remaining end of strap as described in 1. Tighten strap slightly to remove slack. Torque M10x20 bolts on both sides to 39 N m•(28lb-ft)



3 To Lower Front End: Apply moderate pressure to front brake lever, lunge forward to compress front forks while simultaneously pulling upward on strap handle. Attention: BIKE MAY FALL OVER! Short kickstands are required on some models. Contact Brock's Performance for details.



4 DANGER: Strap handle MUST be securely fastened. A loss of control can occur if the strap handle becomes tangled in the front wheel or brake assembly. Brock's Performance recommends a reusable Zip Tie to secure strap handle in a safe location.

To Raise Front End: Press release buckle.

TEST FOR FULL STEERING TRAVEL BEFORE MOVING THE BIKE The front end should travel stop to stop the same as it would without a strap. Additional steering tension will be noticed while lowered.

Brock's Performance Products are designed for Closed-Course Racetrack use ONLY! For more information go to www.BrocksPerformance.com, click: Installation Instructions email: advice@brockracing.com or call the Tech Line 937-424-5802 Brock's Performance Products policies and warranty information: www.BrocksPerformance.com, click: Policies